

**TECHNICAL DATA
SHEET****Petrotreat PO205
Asphaltene Dispersant****PRODUCT DESCRIPTION**

Petrotreat PO205 is a blend of aromatics, surfactants and oil and water-soluble alcohols that make it effective for asphaltene and paraffin deposits. This product was formulated primarily to inhibit asphaltene precipitation in crude oils and condensate. The design of the PO205 enables it to increase the surface tension of the crude oil and condensate. This reaction keeps asphaltene from precipitating in the treated hydrocarbon.

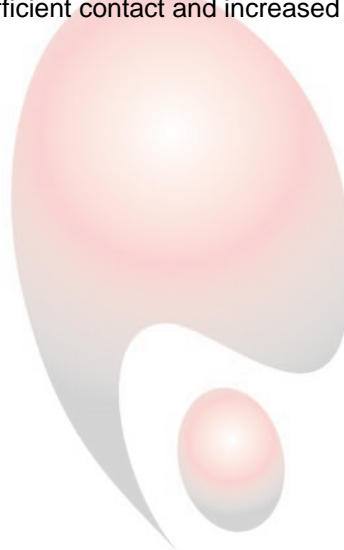
APPLICATION

Petrotreat PO205 Asphaltene Dispersant can be applied as a batch treatment or continuous injection to clean up asphaltene deposits in the wellbore, pipeline or dehydrator. To mitigate asphaltene fouling in the dehydrator a continuous injection of 5 - 20 litres per day is recommended based on severity of fouling.

This product will increase condensate performance as a paraffin solvent for batch programs. The Petrotreat PO205 can also be used in conjunction with paraffin solvents allowing more efficient contact and increased load carry.

PHYSICAL PROPERTIES

Appearance Amber color, clear liquid
Density 0.86 +/- 0.02 kg/l
Flash Point 6 °C

**HEALTH AND SAFETY**

The product described herein may require precautions in handling or use because of flammability, toxicity or other considerations. Petrotreat Inc. can provide Material Safety Data Sheets, which detail the precautions necessary to handle, apply or store this product.